


ASSEMBLY:

1. Align the circular plug on the permanent side shield with the circular indentation on the temple
2. Rotate the side shield up into place

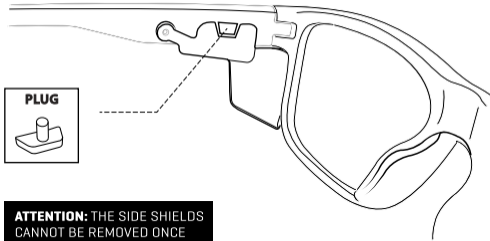

ATTENTION: THE SIDE SHIELDS CANNOT BE REMOVED ONCE THE PLUG IS INSTALLED.

3. Slide the included plug into the hole on the temple between the opening in the side shield